

Intro. and Quick Selection

Incremental encoder

Absolute encoder

special position device

Accessories and Kits

Intro. and Quick Selection

Incremental encoder

Absolute encoder

special position device

Accessories and Kits

MIN58


Programmable Solid Shaft Encoder

Features

- Resolution, output, direction and so on can be freely programmed by supporting software
- Standard $\phi 58\text{mm}$ OD, easy to install
- Max programmable to 65536 pulses
- Suitable for pipeline monitoring, servo system and other applications



Dimension (Installation flanges, hole positions, etc. shall be subject to the order confirmation)

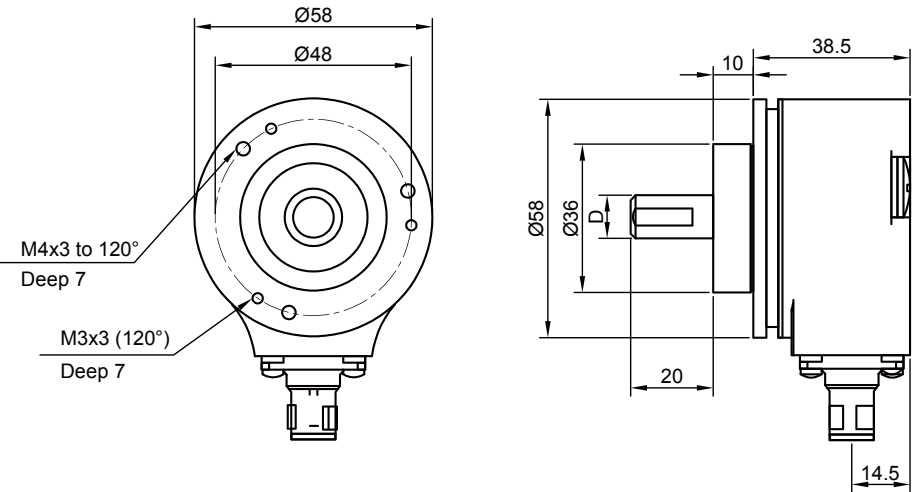

unit: mm


D=6, 10,on request

Connection

Function	3R	8R
GND	white	1
VCC	brown	2
A	green	3
B	yellow	4
Z	grey	5
$\bar{A}$	pink	6
$\bar{B}$	blue	7
$\bar{Z}$	red	8

Ordering Code

Example: PINS5806A593R-1024
58 programmable solid shaft encoder 1024 pulse push-pull output with ABZ inverse signal, axle diameter 6mm, radial straight out cable

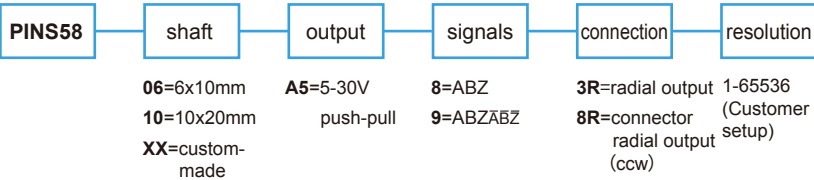

Programming Software

