

Intro. and Quick Selection

Incremental encoder

Absolute encoder

special position device

Accessories and Kits

Intro. and Quick Selection

Incremental encoder

Absolute encoder

special position device

Accessories and Kits

EAXB58

Ethernet Blind Shaft Encoder

Features

- Standard Ethernet interface, $\phi 58\text{mm}$ standard od
- Supports Profinet, PowerLink, TCP/IP and other protocols
- Up to 21 bitsingleturn,14bitmultiturn
- Suitable for industrial Internet of Things and other applications



Specifications

Electrical Specifications

Interface Ethernet

Supply Voltage 10-30VDC

Current Consumption 300Ma

Output Code Binary

Resolution 21 bit single turn (Max.), 14 bit multiturn (Max.)

Output speed 10M or 100MBit/s

Criterion Standard Ethernet

linearity 0.5LSB

Mechanical Specifications

Maximum speed 12000rpm

Shaft load Axial 50N Radial 100N

Starting Torque <0.05Nm

Shock Resistance EN 60068-2-27 1000m/s² 6ms

Vibration Resistance EN 60068-2-6 100m/s² 55....2000HZ



Operating Temperature -40°C to +80°C

Protection Class IP66

Material aluminium alloy

Weight 300g

Dimension (Installation flanges, hole positions, etc. shall be subject to the order confirmation)

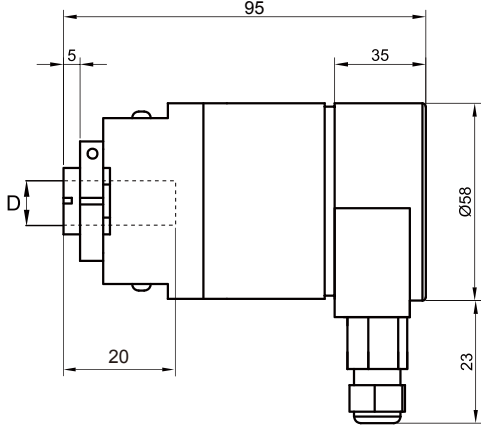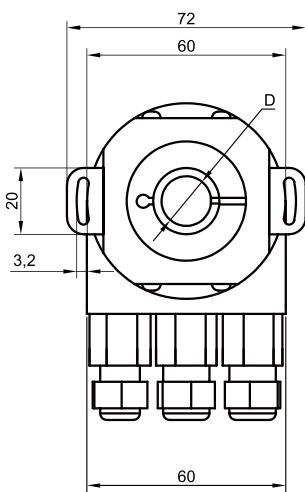

unit: mm

D=6,10,on request

Connection

NET	CD(M12)
RXD+	1(X1,X2)
TXD+	2(X1,X2)
RXD-	3(X1,X2)
TXD-	4(X1,X2)
/	5(X1,X2)
VCC	1(X3)
VCC	2(X3)
GND	3(X3)
GND	4(X3)
PE	5(X3)

Ordering Code

Example: EASB580012E06PNCD
58single turn 12 bit resolution profinet blind shaft encoder, power voltage 10-30V DC, aperture 6mm, terminal box

EAXB58	resolution	power	shaft	output	connection
EASB=ST	1212=12 MT	E=10-30VDC	06=6mm	PN=profinet	CD=M12
EAMS=MT	12 ST		10=10mm	PL=Powerlink	A-coded+M12
	1214=12 MT		XX=custom-made	TI=TCIP/IP	D-coded*2
	14 ST				
	1021=10 MT				
	21 ST				
	1220=12 MT				
	20 ST				
	1418=14 MT				
	18 ST				
	0012=12 ST				
	0021=21 ST				
	custom-made				